# POWER YOUR FUTURE

# SDEC Generator LG400SD

# 6KTAA25-G36

Prime Power: 400KW/500KVA

Standby Power: 440KW/550KVA



# GENERATING POWER SOLUTIONS

# Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

## Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

#### Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

#### Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

#### Premium resale value

Designed and built to last.

#### SAFETY

- Operate safely in accordance with proper operation manual.
  To prevent trouble and accidents perform daily and preventive
- maintenance checks without fail.

SDEC Series 28KVA--1000KVA



# FUAN LONGKAI POWER CO.,LTD.

#### **Headquarters:**

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com



**Alternator** 

# **Technical Data**

Model		LG400SD
Rated prime power	kva	500
Rated standard power	kva	550
Rated voltage line to line	V	400/230
Rated current	Α	722
Maximun sound level	dB(@7m)	100

Engine-SDEC HDE		
Model		6KTAA25-G36
Aspiration	Inline, fo	our stroke, water cooled, pressurized air cooled
Fuel system		Electric pump
No. cylinders		6 in line
Displacement	Liquid	25.18
Bore*Stroke	mm	170*185
Compression ratio		14.5:1
Rated speed	r/min	1500
Rated net power(with fan)	Kw	460
Governor type		ECM
Start Motor	V	24V×9kW

<b>Exhause System</b>		
Exhause gas flow	m³/h	8330
Exhause gas temp	$^{\circ}$ C	500
Max back pressure	kPa	10

Aspiration System		
Max inlet pressure	kPa	11
Air flow	m³/h	3210
Fan consumption	KW	22

Fuel System		
100% load(Prime power)	L/h	111
75% load(Prime power)	L/h	85
50% load(Prime power)	L/h	61
Fuel tank capacity	L	950

<b>Lubrication System</b>		
Oil capacity	L	70
Oil consumption	g/kwh	≤4
Lub. Method		1
(continuous operation)		

Cooling System		
Coolant capacity	L	55
Thermostat operation range	$^{\circ}$ C	77-90
Max water temperature	${\mathbb C}$	104

LG400SD

Model	LONGKAI	LK544C
	STAMFORD	HCI544C-S5L1D-C4/S5L1S-C4
Phase		3
Voltage	V	400/230
Wiring Type	3 Ph	ase 4 wire, Y type
Bearing		1
Power factor		0.8

50 Frequency Hz 400 Prime power ΚW **Exciter Type** Brushless, self-excitation Voltage regulation ±0.5 **IP 23 Protection Grade** Insulation grade H/H Altitude ≤1000 m

## Controller-DEEPSEA

Model DSE6120MK3

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



# **Control Module Options**





- Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- Synchronising control modules
- ■Power output cabinet


Fuan Longkai Power Co., Ltd. | Web: www.longkaipower.com





#### **Standard Features**

Engine(SDEC)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual •

# Unit Dimensions(Basic unit)

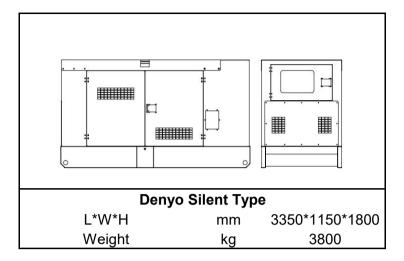

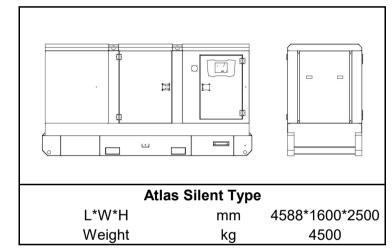

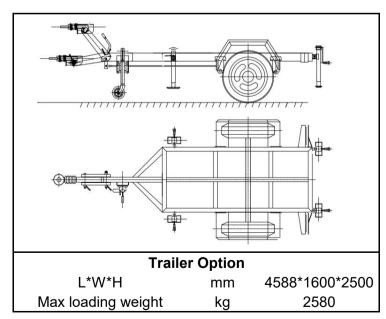

# **Options**

Options		
Battery charge		0
Engine heater		$\circ$
Alternator heater		$\circ$
PMG		$\bigcirc$
Water oil separator		$\bigcirc$
Daily fuel tank		$\bigcirc$
Remote control panel		$\bigcirc$
Automatic transfer switch/AT	S	$\bigcirc$
Switch box		$\circ$
Standard: ●	Options:0	

# Warranty\*

# **SDEC Engine**

24 months from date of purchase and 3000 hours.

#### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

